

# Flat lens imaging does not need negative refraction

Chao-Hsien Kuo and Zhen Ye

Wave Phenomena Laboratory, Department of Physics, National Central University, Chungli, Taiwan 320, Republic of China.

(cond-mat/0312288; an extended version will appear in J. Appl. Phys.)

Sir, in a recent communication Parimi et al.<sup>1</sup> reported the experimental results on imaging by a flat lens made of photonic crystals. They attributed the observed focusing to all-angle negative refraction, which may be expected for the Left-Handed-Materials (LHMs). Here we demonstrate that the experimental observation is *irrelevant* to all-angle negative refraction. Rather, the phenomenon is a natural result of the anisotropic scattering by an array of scatterers.

We consider the system in the experiment<sup>1</sup>: the two-dimensional flat slab made of a photonic crystal fabricated from a square array of cylindrical alumina rods. All the parameters are taken exactly from the experiment<sup>1</sup>. The dielectric constant of the rods is 9.2 and the lattice constant is 1.8 cm<sup>1</sup>. Two arrangements of the cylinders are considered. The first is exactly identical to that in the experiment. A slab has the size of 10x19 lattice constant. The microwave source is placed at a distance of 2.25 cm from the left side of the slab. The frequency is taken as 9.3 GHz. As the comparison, we also consider another arrangement: the square array is added with one more layer of cylinders to become 10x20, and the source is moved upward by a half lattice constant. The transmitted wave from the source is scattered multiply by the cylinders and the scattering can be solved *exactly* by the standard multiple scattering theory<sup>2</sup>.

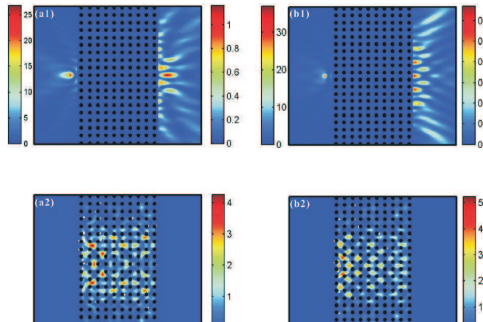


FIG. 1: The image of the intensity-fields for flat slabs. (a1) and (b1) refer to two arrangements. In (a1), all the arrangements including the source, the field resolution, and the cylinders are identical to the experiment<sup>1</sup>. (a2) and (b2) plot the fields inside the slabs corresponding to those in (a1) and (b1) respectively. The scales for the fields for the left and right sides are shown in the figure.

Figure 1 shows the imaging fields across the slabs. In (a1) and (b1), we plot the fields outside the slabs, and the fields inside the corresponding slabs are plotted in (a2) and (b2),

with (a) referring to the case in the experiment. The result in (a1) remarkably reproduces the experimental observation. A focused image is obviously seen on the far side. Parimi et al.<sup>1</sup> suggested "... to focus a diverging beam from a point source, the material must exhibit all-angle negative refraction, ..." We find that this perception is invalid. If the image were caused by the all angle-negative refraction, one would expect that (1) another focused image should exist inside the slab; (2) both images should not be sensitive to the lattice size, nor the source location. Our simulation shows that there is no image inside the slab and the image on the far side is sensitive to both the size of photonic crystal slab and the location of the source. This has been clearly depicted by Fig. 1(a2), (b1) and (b2). Fig. 1(a2) shows the image field inside the slab used in the experiment. No focused image prevails. Rather, the waves more or less go straight across the slab. For the second slab, the image field on the far side is changed completely, while the general features of the field inside the slab remain unchanged.

The focusing effect by the flat slab in Fig. 1(a1) is caused by the anisotropic scattering of the regular arrays of cylinders. Figure 2 shows the band structure result and the transmission across the slab used in the experiment<sup>1</sup>. The simulation setup complies with the experimental arrangement listed on the webpage<sup>3</sup>. The intensity transmission in the two principal directions, i. e.  $\Gamma X$  and  $\Gamma M$ , is plotted. The result for the  $\Gamma X$  direction agrees with the experimental result<sup>3</sup>. We note that the dielectric constant used in the transmission experiment<sup>3</sup> is 8.9, while it is 9.2 in the imaging experiment<sup>1</sup>. To be consistent with the imaging experiment, we use 9.2 throughout. It is seen that the transmission in the  $\Gamma X$  direction is much stronger than that in the  $\Gamma M$  direction at the experimental frequency 9.3 GHz. Due to the anisotropic scattering, the waves rather prefer to travel along the  $\Gamma X$  than along the  $\Gamma M$  direction. Such an anisotropy-caused imaging phenomenon has also been discussed for frequencies located in the partial bandgap regimes in a variety of situations<sup>4</sup>.

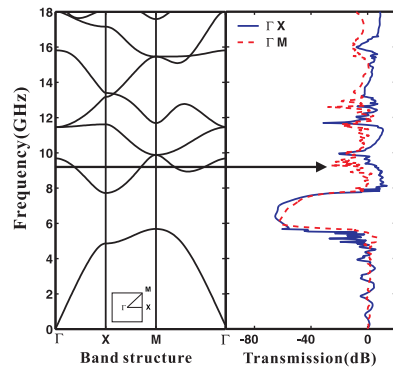


FIG. 2: Left panel: The band structure calculation. Right panel: the transmission calculation; the solid line refers to the result for the transmission along the  $\Gamma X$  direction and the dotted line to that from the  $\Gamma M$  direction.

1. Parimi, P. V., Lu, W.-T., Vodo, P. and Sridhar, S., Nature **426**, 404 (2003).
2. Twersky, V., J. Acoust. Soc. Am. **24**, 42 (1951); Chen, Y.-Y. and Ye, Z., Phys. Rev. Lett., **87**, 184301 (2001).

3. <http://sagar.physics.neu.edu/>

4. Kuo, C.-H. and Ye, Z., Phys. Rev. E (*in press*) cond-mat/0310423; *ibid*, Phys. Rev E **70**, 026608 (2004); *ibid*, Phys. Lett. A Vol 331/5 pp 342-347 (2004).

Correspondence and requests for materials should be addressed to Z.Y. (e-mail: zhen@shaw.ca).